

# PEGASUS+CN

SEGATRICE A NASTRO AUTOMATICA **PER TAGLI DA 0° A 60° A DESTRA**  
 AUTOMATIC BAND SAW MACHINE **FOR CUTS FROM 0° TO 60° RIGHT**



## Standard

- Encoder per memorizzazione inizio e ritorno della lama
- BP - Barriere di sicurezza per la protezione dell'operatore
- Arco, morse e carro sono movimentati tramite cilindri idraulici
- Corsa avanzamento utile carro di 1000 mm
- Rulliera per appoggio materiale lunga 1100 mm, collegata al basamento in lato carico
- N1 BOX - Nebulizzatore ad un ugello
- Riduttore ad ingranaggi (rendimento 95%)
- Spazzola puliscilama motorizzata




- Encoder to memorize both up and down head limit positions
- BP - Safety barriers for operator's protection
- Head, vices and carriage moved by hydraulic cylinders
- Carriage feeding usable stroke of 1000 mm
- Material supporting roller table 1100 mm long, connected with the basement on loading side
- NB1 BOX - One nozzle sprayer
- Helical gearbox (95% of efficiency)
- Motorized cleaning brush

## Optional

ST - MV-PEG - RPM2 - PRP - NB2 BOX - LX - MT-A

## Dotazioni accessorie Accessory equipments

C3 - RFP2A

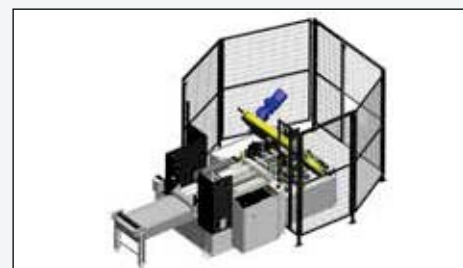

BP - Barriere di sicurezza per la protezione dell'operatore.

*BP - Safety barriers for the operator's protection.*



Morsa con sistema di scorrimento rapido a cremagliera.

*Material vice with fast sliding rack system.*



Pannello touch screen da 10".

*10" touch screen control panel.*

mm	Ø	axb	axb	axb
0°	330	330	330x460*	330x460
45°→	330	330	330x330	190x360
60°→	240	160	160x230	160x230

\* = Fino a 500 mm per tagli in ciclo semiautomatico  
 Up to 500 mm for semi-automatic cuts

 4120x34x1,1 mm	 16÷120 m/min	 3 kW	 0,20 kW	 1,1 kW	 0,13 kW	 350 mm	 2170 Kg	 4,7x2,9x2,1 m axbxc	 750±10 mm	 200x410 mm axb
---	---	--	--	---	--	---	--	--	--	---

